

PuriSorb[®] PT Series


Features

- Pleated type filter which can be customized by customers' needs is typical filter variously applied on Facility (FFU, OAC, & AHU) and Equipment.



<Filter Installation on FFU >

<Pressure drop >

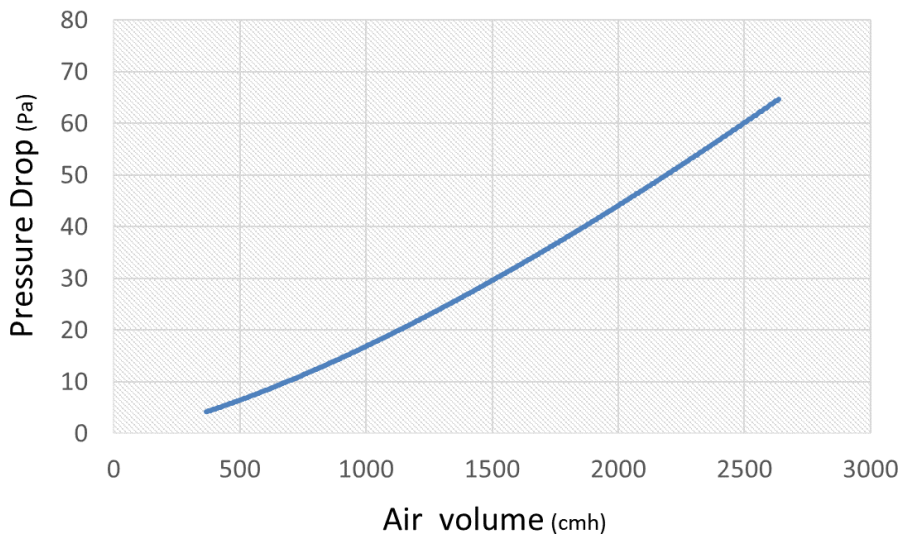

<Filter Installation on EQPT >

Equipment & FAC (OAC, FFU) Filter

General specification



Filter type	Pleated type
Frame material	Aluminum
Size[mm] (Height x Width x Depth)	610 x 610 x 150 770 x 220 x 150 (Customizable & Variable)
Typical air flow rate	0~3,000m ³ /H
Target gases	NH ₃ , Amines Acids (HF, HCl, Cl ₂ , NO _x , SO _x , H ₂ S) VOCs (Toluene, PGMEA, Siloxane) O ₃