

# PuriSorb<sup>®</sup> PT Series


## Features

- 고객 맞춤형 필터 제작이 용이한 대표적인 Pleated Type 필터로서, Facility(FFU /OAC / AHU) 와 장비용 필터에 폭 넓게 적용됩니다.



<Filter Installation on FFU >

<Pressure drop >

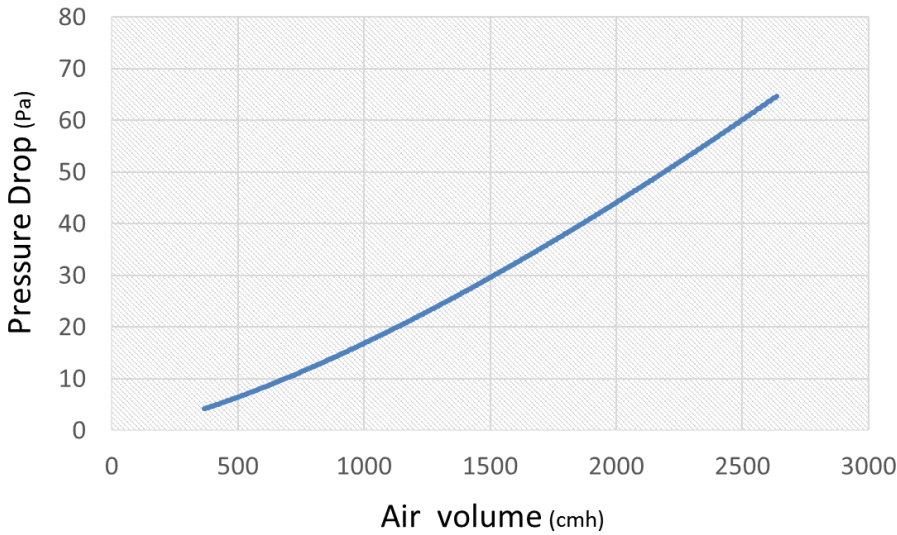

<Filter Installation on EQPT >

### Equipment & FAC (OAC, FFU) Filter

#### General specification



Filter type	Pleated type
Frame material	Aluminum
Size[mm] (Height x Width x Depth)	610 x 610 x 150 770 x 220 x 150 (Customizable & Variable)
Typical air flow rate	0~3,000m <sup>3</sup> /H
Target gases	NH <sub>3</sub> , Amines Acids (HF, HCl, Cl <sub>2</sub> , NO <sub>x</sub> , SO <sub>x</sub> , H <sub>2</sub> S) VOCs (Toluene, PGMEA, Siloxane) O <sub>3</sub>