


# PuriSorb<sup>®</sup> TT Series

## Features

- Tray type filter is applied on Facility (OAC and AHU).
- The way of replacing just tray inside of filter box(frame) make its management convenient.

<Pressure drop >

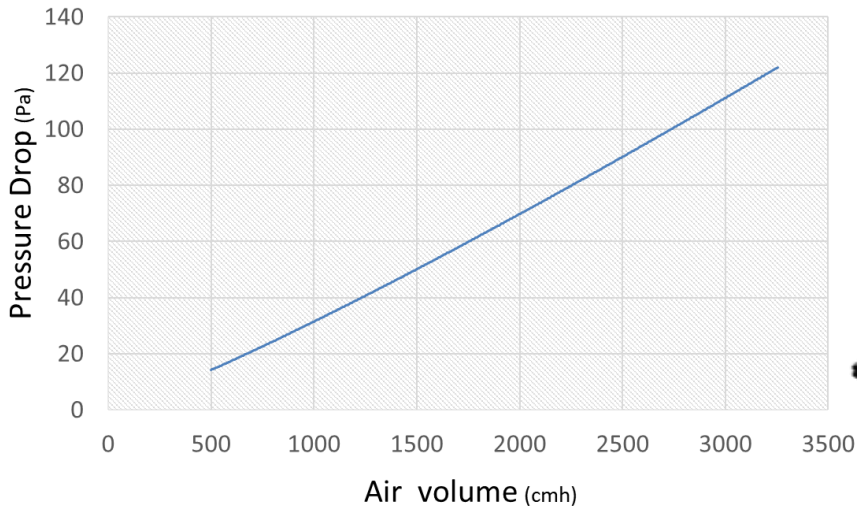

<Installation on filter box>

### Facility (OAC, AHU) Filter

#### General specification



Filter type	Tray Type
Frame material	SUS
Size[mm] (Height x Width x Depth)	610 x 610 x 450 (Customizable)
Typical air flow rate	0~3,000m <sup>3</sup> /H
Media	NH <sub>3</sub> , Amines Acids (HF, HCl, Cl <sub>2</sub> , NO <sub>x</sub> , SO <sub>x</sub> , H <sub>2</sub> S) VOCs (Toluene, PGMEA, Siloxane) O <sub>3</sub>